MADE IN CHINA

Bluetooth Headset

User's Manual

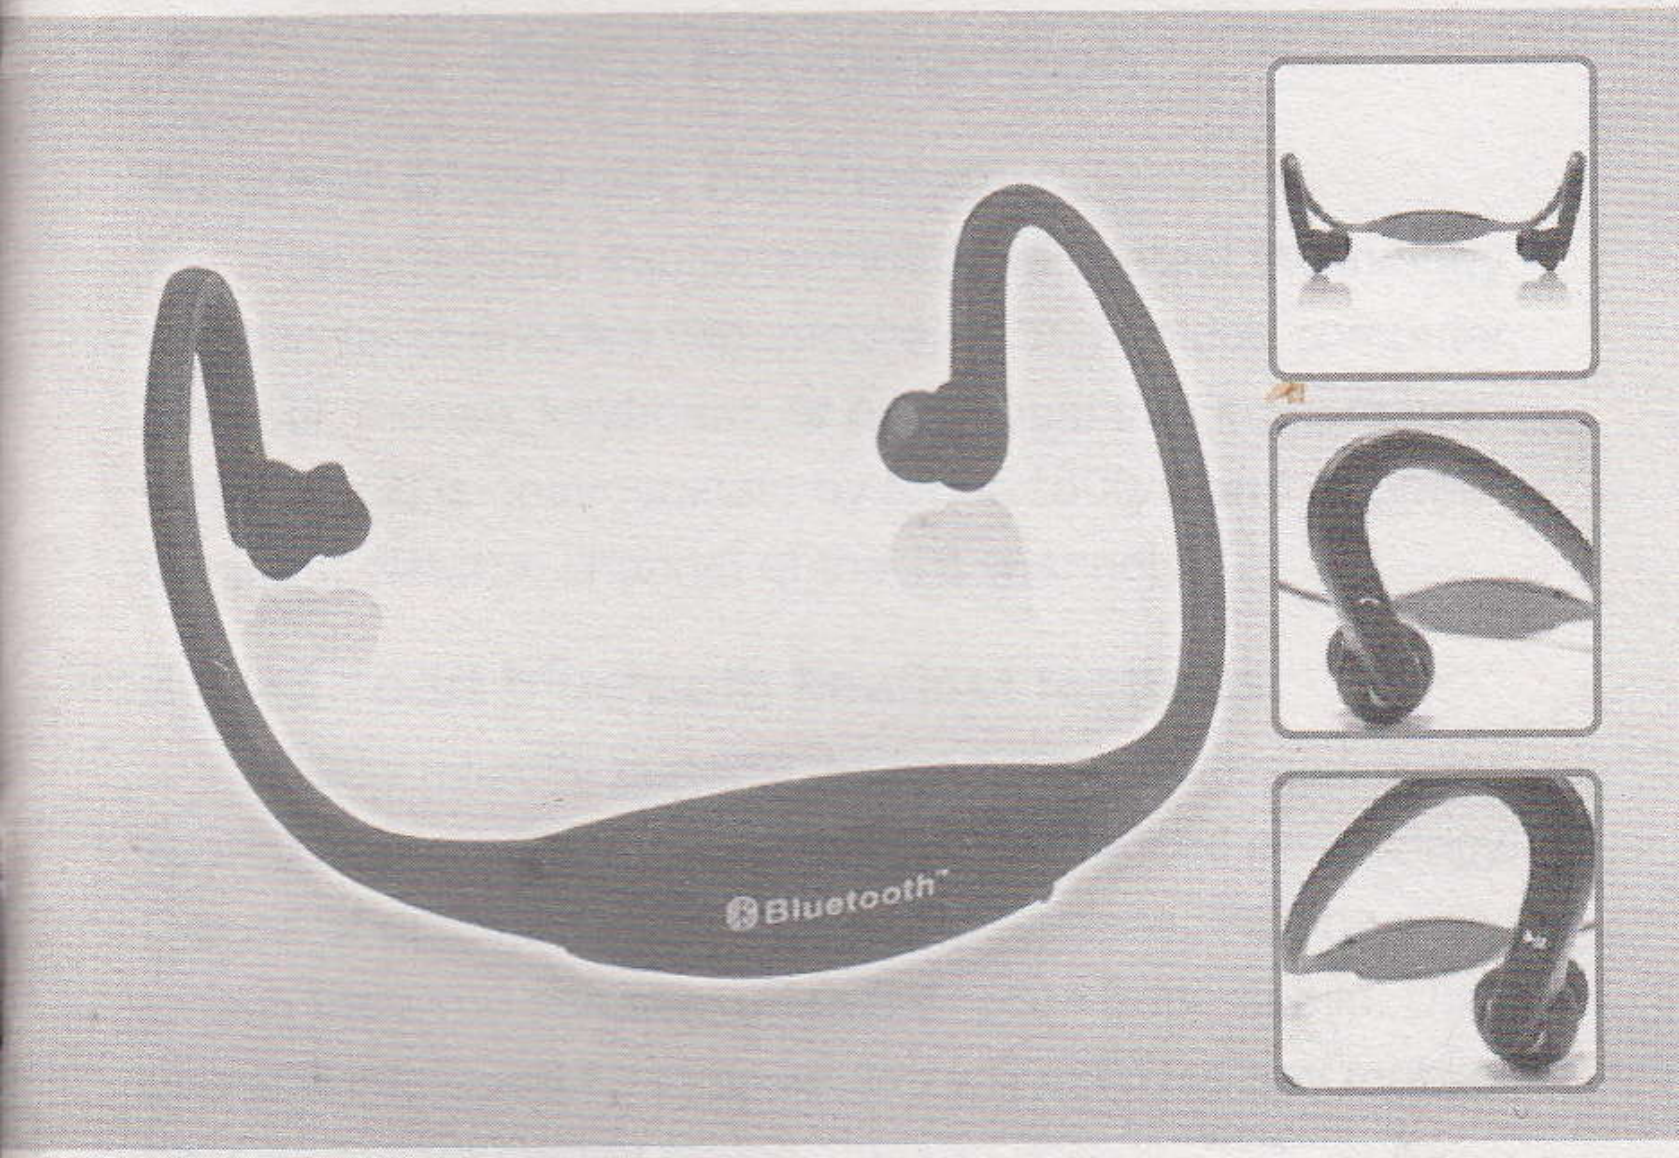

[redacted]th Headset Operation Manual

Thank you for using our company's sport Bluetooth headset product ,for your fast, skilled operate of this product, easy, happy to use this product. Please read this manual carefully.

Brief Introduction

Wireless Bluetooth Technology

The bluetooth equipment made with latest technology and can be connected with mobile, PDA, desktop computer, headset, mouse, keyboard, or other Bluetooth equipments wirelessly. It is communicate by letter 1600/s and choose the least disturbe channel of the 79 channels.

Z-W88 sport bluetooth headset features

Slinky exterior, portable design.Enjoy your music during sport by stereo. The idea according to advanced somatology. Get rid of disturbing cables, just by wireless. Pairing with mobile then you can cast off radialization from mobile. Unique and intelligent function let you will not miss any mobile calls during you enjoy music.

Use Range

* paired with the Bluetooth mobile, wireless enjoy mobile phone music, incoming call Liangbu Wu;
* paired with PC (with Bluetooth function or connect USB adapter), wireless enjoy network music;
* paired with PC (with Bluetooth function or connect USB adapter) wireless remote chat (support QQ, Skype, MSN, etc.).
* Support Iphone 3G，Iphone 3GS.
  Wireless music transmission,pairing&calling

Accompanying Accessories

* Z-W88 wirelless stereo buletooth headset
* USB Charging cable * Operation Manual
* Warranty Card(Optional Card)

Start Use

Charge bluetooth headset

Headset built-in rechargeable lithium battery. Not full of energy in new headset's batter. The first to use it, please charge it at least 4 hours to let it full of energy. After the first time using, can charge it 1-2 hours enough..When charging

The blue light is bright, when the charge is saturated the blue light is not bright. Fully charged battery can support about 5 hours of continuous working hours.

Connecting USB cable directly to computer to charge (Suggest:Don't use the car charger at first time)

Button Definition and Function

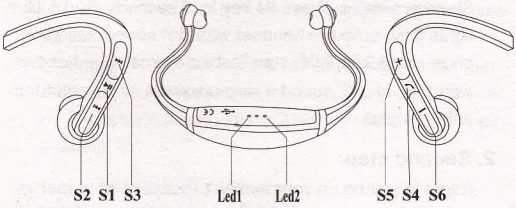

S1 Play/Pause / Refuse (talk status)
S2 Upward S3 Backward
S4 On/Off, match Bluetooth with equipments
S5 Volume + S6 Volume -
Led1 Red light for single
Led2 Blue light for stereo

Introduction to Bluetooth Equipments Pairing

Pairing is a process to connect Bluetooth equipments each other. It will create a permanent and safe link between your equipments and provide them with quick service from Bluetooth without using any password.

1. First step:

Shutdown status: Press S4 key for 5 seconds→red & blue lights flash quickly→headset with"de" sound→red light once→red & blue lights start flashing alternately, →headset with "bi, bi ..." sound→stop press S4 key→enter into pairing status.

2. Second step:

Begin to pairing on your mobile (Please refer to mobile user manual). After searching you will get "Z-W88" in your mobile equipment list.

3. Third step:

You will be required to enter Pin-Code→ Password 0000 is needed to enter→ Pairing successfully.

(Note: 0000 is a default pairing Pin-Code for bluetooth headset)

4. Fourth step:

Pairing successfully→headset with "bi, bi..."sound→Red & blue lights flash slowly, single & stereo are connected successfully.

* Only red light flashes slowly→ single connected successfully.
* Only blue light flashes slowly→ Stereo connected successfully.

Note:

If headset cannot find the pairing equipment in 3 minutes will automatically shutdown.

If headset isn't in pairing status, your mobile and other bluetooth equipments cannot search headset, please set the headset on pairing status then your mobile can begin to search.

Start-up & Shutdown

1. Start-up headset

Shutdown status: Press S4 key for 2 seconds→red & blue lights flash for 1 second→red light flash for 1 time→headset with "bi,bi..." sound→red light flash→stop press S4 key →start-up headset successfully, begin to connecting mode→automatic search has been paired device→

Connected to stereo while the blue light flash once per second; connected to a mono→ the red light flash once per second; at this time connections on the stereo and mono →red &blue light flash per second at the same time once; if not connected, then enter the standby mode, the red light flashes continuously.

2. Shutdown headset

1) Start-up status: Press S4 key 3 seconds→ red & blue lights flash quickly for one time→headset with "bi" sound→Shutdown.

2) When Searching the equipment or without the receive range of headset,will automatically shutdown after not get any connection in 1 minute.

Basic Use Method

Dial、Talk & Finish calls

Afer the bluetooth headset finish pairing with your mobile, you can use the headset to answer the phone or enjoy the mobile setero music.

Mobile dial, talk and finish a call

Dial a call

1) Using your phone, dial numbers as usual in the same manner, during connecting, headphones with vibration ring tones, When getting calls,sound will be automatic in the headset→red light flashes slowly(around 1 time/second).

2) The selected or phones should be set aside to complete your numbers, press the S4 key twice, during connecting, headphones with vibration ring tones, When getting calls, sound will be automatic in the headset→red light flashes slowly(around 1 time/second).

Talk & finish a call

When a call comes, you can hear the alarm sound "Di, Di....", the headset red light keep lighting.

1. The mobile ringing→press shortly the S4 key or press the receiver key on mobile→red light flashes quickly (around 2 times/second).
2. Call: press shortly the S1 key,go to the mobile phone, and then press the S1 key again to answer the call. (Some phones may not support this feature, the call forwarding can not be completed)
3. If you want to refuse the call, you can press S1 1 second shortly.
4. During talking, press S5 key, volume +, press S6 key,

volume -. (From low to high total 15 levels, you can hear "Bi ,Bi" when on low or on hight)

5. Press S4 key shortly, Off key on mobile or the other side hang up the call to finish it→red light flashes slowly (around 1 time / second). After that, If connected stereo→Red & blue lights flash slowly→automaticlly turn to setero status.

Mobile Stereo music Play Mode

Need to pairing the mobile and set it play the music by bluetooth stereo system

1. Playing music, press S3 key quickly to Backward.
2. Playing music, press S2 key quickly to Upward.
3. Playing music, press S1 PLAY key quickly, music stops. Press S1 PLAY key quickly, music playing.

Note:

Base on different design for different mobiles, during the headset stand-by mode, the bluetooth connection may be automatically cut off.

PC or PDA connect with headset

The bluetooth headset can be also connected with PC or

PDA, please refer to your PC or PDA user manual.

Pairing with USB computer bluetooth dongle

Stereo music play mode:

1) USB dongle insert into computer USB port, put the CDR into computer' s CD room, setting program, after setting, re-start the computer, then setting successful.

2) Pairing:

First step: Plug the USB dongle into the computer' s USB port→enter into pairing status→Red, blue lights flash alternately.

Second step: Headset into pairing state (red & blue lights flashing alternately)

Third step: Start-up "My bluetooth" in the computer, searching the bluetooth equipment, then you can find the "Z-W88" equipment list.

Fourth step: Choose "Z-W88" in the list, input the Pin-Code "0000" on the computer

(Note: "0000" is the fixation pairing Pin-Code for bluetooth headset).

Fifth step: Pairing successfully, red & blue light flash slowly (around 1 time / second).

Note:

If the bluetooth headset isn't on pairing status, the USB bluetooth dongle cannot search the headset. Please set up the headset on pairing status then begin to use the USB bluetooth dongle to search.

3) Start-up the headset, after pairing successfully, start-up the computer's media player to play musics.

a. Playing music, press S3 to next backward song.

b. Playing music, press S2 to next upward song.

c. Playing music, press S1, music stopped, press S1 again, music played.

Note:

Use other USB bluetooth dongle may be missed some function, we suggest to use our special USB bluetooth dongle for our headset.

Skype:

1) Start-up the headset, after pairing successfully, start-up skype on computer.

2) Dial number function: You can use the mouse to process with skype, or choose the person whose you want to call first, then press S4 for 2 seconds to call.

3) Sound communicate function: When the call coming from skype, can hear "Di…"sound in the headset→press S4 to answer the phone (or press the answer key on skype directly)→Enter into communicate status.

4) Finish/Refuse the call:

After communicate on skype→press S4 to finish the call (or press the finish key on skype directly).

5) When the call coming from Skype, if you don't want to answer the phone,you can press the refuse key on Skype directly.

6) After finish the call, the headset can automatically enter into the stereo mode to enjoy the musics.

QQ:

1) Start-up the headset, after pairing successfully, start-up QQ on computer.

2) QQ setup: press the audio setup, choose the imput and output to "bluetooth audio"→Finish.

3) Dial number function: this operation can be only progress on QQ throught mouse.

4) Answer the phone: During the call coming from QQ, you can hear "Di…"sound in the headset, press the answer key on QQ by mouse→Enter into communicate status.

5) Finish /Refuse a call:

a. After communicate on QQ→Press S4 to finish the call (or press the finish key on QQ directly).

b. When the call coming from QQ, if you don't want to answer the phone, you can press the refuse key on QQ directly.

6) After finish the call, the headset can automatically enter into the stereo mode to enjoy the musics.

Note:

a. when using a headset with the internet in the long-distance call, the Bluetooth adapter driver software is different ,the use of methods of operation are also different.

b. when using a headset with the internet in the long-distance call ,if it's a silent call, please set call tool (QQ, Skype, MSN) of the audio settings for audio input and output in the Bluetooth status.

Important Information

1. Red light flashes slowly?

- The bluetooth headset is low power, please charge it as quick as possible.

2. The headset can not be stat-up after charge for 20 minutes?

- The bluetooth headset need to be charged for 40 minutes at least for start-up, suggest to charge enough power consumingly before using.

3. No indication during charge?

- *If the battery was used out of power completely or didn't use* for long time, when you use at the first time, may be no indication light, but need to wait for a few minutes, then red light will be flash for charge indication.

4. No sound on the headset?

- Make sure the headset had been paired successfully with the mobile.
- Make sure the headset had been started up.
- Make sure the distance between the heaset and mobile don't exceed 5 meters.
- Make sure your mobile is in the strong enough signal range.
- Some of mobiles only support one of bluetooth headsets, if more than one bluetooth headset pairing with the mobile, the connection may be interrupted.

5. After charging has been finished, why does not my headset work with my mobile?

- Your mobile's Bluetooth has to be activated first and paired with your eyewear.

6. Can my bluetooth headset work with mobile of any model?

- No. It can only work with mobile which has bluetooth.

7. What is the effective distance for headset and Bluetooth mobile?

- Their maximum effective distance is 10 meters, but that may vary depending on specific enviroment or mobile specifications. Some mobile's effective distance may be less than 10 meters or only around 5 meters.

8. When my mobile is searching the headphone, why do several bluetooth equiments appear?

- Within the effective distance, most Bluetooth mobiles will search several Bluetooth equipments (like PDA, Notebook ···) after their Bluetooth has been activated. When your mobile found them, "Z-W88" (or Unknown Equipment) will appear on your mobile.

9. Why can not my mobile find Bluetooth equipment?

- If your headset has not been paired with other equipment, your mobile can not find any Bluetooth equipment. Before using your mobile to search any equipment, make sure equipment is paired. (Refer to user manual for detailed instructions)

10. Should pairing between headset and mobile be repeated every time when using them?

- No. So long as pairing has been successfully set, headset and mobile will keep paired even if any one or two of them are shut down.

11. Why do noises arise?

Bluetooth equipments' performance is affected by any one of the following factors:

- Whether mobile is within a strong-signal area or not. If the mobile is within a weak-signal area, its effect will be worse.
- Whether mobile is within the effective distance or not.
- The communication effect of QQ & Skype depend on the network.

12. What should I do if my headset can not receive well?

- Adjust the volume button or press "Volume+" on your mobile to increase the volume and test if mobile is within a strong-signal atea.

13. Why can not my headset work suddenly?

- No power. When battery is low, red indicator will flash, "di,di···" can be heard on the headset.

14. Why not out of commission of incoming telegram displays?

- It will not display the incoming telegram when you dial numbers, or your mobile cannot support incoming telegram displays.

15. Why different answer fashion with different mobile?

- Different mobile maker use different bluetooth software. For example, for T610, only need to press S4 gently to answer the call, however, for P800 and P900, you should press S1 for 3 seconds then can answer the phone. That cause by P800 and P900 are intelligent mobile, so a little different definition for using keys. Commonly, the way of answer phones are "press the key gently" or "press the key for 3 second".

Headset Maintain

* If use non-original accessories, it may cause capability comes down, body hurted, short circuit or abate the maintain.
* If disassembly your bluetooth headset, it may cause the headset shatter or abate the maintain.
* Don't place the headset on more dust range.
* Use the clean, soft and dry fabric to clean your headset.
* When you don't want to use the headset, please put it

into the packing.

* Don't let children play headset, they may hurt themselves or break the headset.
* Don't put headset on more hot or more cold environment, otherwise the headset may not be used for a while.

Travel Charger

* The charger only designed for using in indoor, don't use it in outdoor.
* The charger can be only used within the indication voltage range.
* When pull out the charger from the socket, don't pull it strongly, otherwise it may attaint the charger.

Interrelated information for battery

New battery: At first time to use the product, charge the headset battery for 4 hours at least.

Maintain battery

* Please take down or replacing the battery on some salted maintain center.
* If use it carefully,the life for it will be long.
* Temperature for charge is 10℃ to 45℃.

* Base on room temperature using, can get the largest capability.
* Using at outdoor temperature, will cause reduce the capability.
* If headset do not use for long time, need to charge it 1 time at least per 2 monthes.

Features and Specifications

* Wireless enjoy stereo music playing
* Wireless dial, talk phone calls
* Wireless enjoy stereo music from the computer
* Use the Internet to achieve long-range wireless two-way communication;
* Wireless enjoy stereo music, set aside to answer the call automatically converted,
* High-fidelity, CD quality sound effects;
* Remote control music playback status (remote control music playback, pause, up and down selections, volume control);
* High sensitivity, omni-directional microphone design, voice clarity, no echo;

Specification:

Product Name	Wireless Bluetooth Stereo Headset
Edition	V2.1+EDR
Frequency coverage	2.402GHz~2.480GHz ISM Band
Sensitivity	-80dbm
Wireless Transmit Standard	CLASS 2
Channel	79channels of 1MHz BW
Contact Terms	Point-to-Point
Transmit Range	≤10M
Frequency Response	20Hz-20KHz
S/N rate	80db
Speak power rate	2X10mW
Status Indication	Red Led call status Blue Led stereo Status, charging instructions
Pairing products	AD2P, ACVRP Bluetooth protocol of the computer, USB Bluetooth adapter, Bluetooth cell phones
Battery	Lion. 3.7V 150mA
Charge Time	1-2 hours
Charge Power	PC USB 5V
Operate hours	>5 hours (battery saturation)

Z-W88蓝牙耳机使用说明

感谢阁下使用本公司出品的后挂式蓝牙立体声耳机，为了您能快速、熟练的操作本产品，轻松、愉快的使用本产品。请先认真、仔细阅读本说明书。

简　介

无线蓝牙技术

蓝牙是一种短距离无线通讯技术。它支持蓝牙设备之间的无线连接，比如手机、PDA、电脑、耳机、鼠标、键盘、打印机等等。它的工作频率根据ISM标准在2.4G-2.48G之间，通信时以每秒1600次的速度在79个频道上跳频以选择干扰最小的通道，蓝牙技术的通信范围是10M(CLASS II标准)。

Z-W88运动型蓝牙耳机特点

外型采用美观、轻便行的后挂式设计，在运动中也能听到美妙的立体声音乐；先进的人体学设计耳挂，配带舒适、方便。采用先进的蓝牙技术设计，

在使用中摆脱数据线缠绕的烦恼，与手机配对使用使你摆脱手机辐射的伤害；独特的、高智能的功能设计，在欣赏音乐时也不错过每一个电话，使用更轻松、方便。

使用范围

* 与蓝牙手机配对使用，无线欣赏手机音乐、接听来电两不误；
* 与电脑(具有蓝牙功能或连接USB适配器)配对使用，无线收听网络音乐；
* 与电脑(具有蓝牙功能或连接USB适配器)配对使用，无线远程聊天(支持QQ、Skype、MSN等)。
* 与支持Iphone 3G,Iphone 3GS无线音乐传输和无线通话配对连接

包装清单

* Z-W88蓝牙耳机
* USB充电线
* 说明书
* 保修卡(选配卡)

开始使用

充　电

蓝牙耳机内置可充电电池，新耳机的电池电量不是充足的，在第一次使用之前，请至少充电4小时以使电量充足。之后，充电将大约需要1-2小时。充电时蓝灯亮，充电饱和时蓝等灭。充满电的电池可以支持大约5小时的连续工作时间。

将USB充电线USB-A插入电脑USB插座，MINI USB插入耳机MINI USB插座。(建议第一次充电不要使用车载充电器)。

按键功能(按键顺序需要与实物对照)

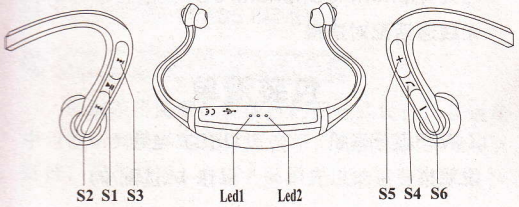

S1 PLAY按键：播放 / 停止(立体声状态)；拒听(来电状态)

S2 上一曲按键：上一曲(立体声状态)；

S3 下一曲按键：下一曲(立体声状态)；

S4 开关按键：电源开关，接听电话，结束电话，与其他设备配对；

S5 音量增加按键：音量+；

S6 音量减小按键：音量−；

Led1 单声道红色指示灯；

Led2 立体声蓝色指示灯。

耳机与蓝牙设备的配对

在您使用您的蓝牙耳机之前必须与您的手机(或其他蓝牙设备)进行配对。

第一步：耳机在关机状态按S4键5秒，耳机红蓝灯亮1秒，耳机发出“嘚”声，红灯亮一次， 当红色和蓝色指示灯开始交替闪烁，耳机发出bi、bi两声，停止按S4键，耳机进入配对状态。

第二步：在您的蓝牙手机上开始配对过程（详细过程请参考手机说明）。搜索完成后您将会在设备列表中找到名为“Z-W88”的新设备。

第三步：您将会被要求输入配对码(Pin-Code)。请在手机上输入蓝牙耳机的配对码：0000 ，配对过程就完成了。

（注：0000 是蓝牙耳机的固定预设配对码）

第四步：配对成功，耳机将发出一“bi”声，红、蓝灯同时缓慢闪烁，单声、立体声连接成功。如只有红灯慢闪，则只有单声道连接成功；如只有蓝灯慢闪，则只有立体声连接成功。未连接成功须相应的连接操作。(约每秒闪烁一次)

☞ **注意：**

如果耳机在3分钟内没找到配对设备将自动关机。

如果蓝牙耳机不在配对状态下，您的手机或其它蓝牙设备就不能搜索到耳机，请将耳机设定到配对状态后再用手机进行搜索。

耳机的开关

1. 耳机的开机

关机状态按下S4键2秒，红、蓝色指示灯亮1秒，红灯闪烁一次，耳机发出“嘀”声，红灯闪烁，停止按S4键，耳机开机完成，进入连接模式；自动搜索已配对设备，连接上立体声则蓝色指示灯每秒闪烁一次；连接上单声则红色指示灯每秒闪烁一次；同时连接上立体声和单声则红、蓝色指示灯每秒同时闪烁一次；如都没有连接上，则进入待机模式，红色指示灯连续闪烁。

2. 关闭耳机

1. 在开机状态，按下S4键3秒，红、蓝色指示灯快速闪烁一次，耳机发出一“嘀”声，关机。
2. 在查找连接设备状态下或离开耳机的接收范围，3分钟后没找到连接设备自动关机。

基本使用方法

拨打、接听和结束电话

当蓝牙耳机和你的手机完成配对之后，您就可以使用耳机来接听电话或收听手机播放的立体声音乐。

手机拨出、接听和结束通话

拨出电话

使用手机的键盘拨号

1. 用你的手机按照和平时同样的方式拨号，连接过程中耳机将发出振铃声，电话接通后，声音会自动切换到蓝牙耳机，接通后红灯慢闪（约每秒闪烁一次）。
2. 选定或手机输入完您要拨出的电话，按 S4 键两次，连接过程中耳机将发出振铃声，电话接通后，声音会自动切换到蓝牙耳机，接通后红灯慢闪(约每秒闪烁一次)。

接听和结束通话

当有电话打进时，您会听到耳机“嘀，嘀”提示音，耳机红色指示灯常亮；

1. 电话铃响时，短按一次 S4 键或按手机接听键可接听电话。接通电话后红灯快闪 (约每秒连续闪烁二次)。
2. 通话中：按S1键一次，转到手机电话，再按S1键一次又转到耳机接听电话(有部份手机可能不支持此功能，无法完成通话转接)。
3. 电话铃响时，短按一次S1键可拒绝接听来电。
4. 通话时按一次音量增加键(S5)，为增大音量一级，按一次音量减小健（S6）,为降低音量一级(从小到最大共有15级，到最大和最小音量你都能听到“bi”声)。
5. 短按一次S4键、手机挂机键或者对方挂机可以结束通话，通电话结束后红灯慢闪 (约每秒闪烁一次)，如连接有立体声将红、蓝灯同时慢闪，

自动转到立体声状态。

手机立体声音乐播放模式(蓝牙耳机连接后的默认状态)

需配对手机支持立体声音乐播放。

1. 音乐播放时，快速按一下下一曲键(S3键)，到下一曲。
2. 音乐播放时，快速按一下上一曲键(S2键)，到上一曲。
3. 音乐播放时，快速按一下PLAY键(S1键)，音乐停止，再快速按一下PLAY键(S1键)，音乐播放。

☞ **注意：**

基于某些手机的不同设计，在蓝牙耳机待机状态下有可能会与手机自动断开。

与PC或PDA连接

蓝牙耳机也可以连接到带有蓝牙音频网关的PC或者PDA上。具体操作请参考您的PC或者PDA的操作手册。

USB电脑蓝牙适配器与耳机连接

立体声音乐播放模式

1. USB蓝牙适配器插入电脑USB端口，安装光盘放入电脑光驱，运行安装程序，安装完毕，重新启动电脑。安装完成。
2. 配对：

第一步：将USB蓝牙适配器插入电脑USB端口;

第二步：耳机进入配对状态（红、蓝灯交替闪烁)。

第三步：打开电脑中的“我的蓝牙”，搜索蓝牙设备，搜索完成后您将会在设备列表中找到名为“Z-W88”的新设备。

第四步：选择“Z-W88”，您将会被要求输入配对码 (Pin-Code)。请在电脑上输入蓝牙耳机的配对码：0000 ，配对过程就完成了。

(注：0000 是蓝牙耳机的固定预设配对码)

第五步：配对成功，红、蓝灯缓慢闪烁(约每秒

闪烁一次)。

☞ **注意:**

如果蓝牙耳机不在配对状态下，您的USB蓝牙适配器就不能搜索到耳机，请将耳机设定到配对状态后再用USB蓝牙适配器进行搜索。

3. 打开耳机，连接成功后，电脑打开播放媒体播放音乐 (同时也可以通过电脑界面操做)。
   a. 音乐播放时，快速按一下下一曲键(S3键)，到下一曲。
   b. 音乐播放时，快速按一下上一曲键(S2键)，到上一曲。
   c. 音乐播放时，快速按一下PLAY键(S1键)，音乐停止，再快速按一下PLAY键(S1键)，音乐播放。

☞ **注意:**

a. 用有的USB蓝牙适配器可能失去部分功能，建议使用本耳机专用 USB蓝牙适配器。

b. 由于蓝牙适配器有多种，驱动软件也不同，使用

方法可能有不同。

skype通话

1. 打开耳机，连接成功后，电脑打开skype。
2. 去电拔号功能：通过鼠标对skype进行操作，也可以先选择要联系的人，然后按S4键2S拨出。
3. 语音通话功能：skype来电后，振铃传到蓝牙耳机上，操作蓝牙耳机上S4 键接听来电，接听成功(也可通过skype接听键完成)，skype界面上会显示相应的正在通话状态。
4. 挂机/拒绝来电的功能：当skype来电后，在接听完闭，操作耳机上的S4键结束通话 (也可通过skype界面上挂机/拒绝键完成)。
5. 当skype来电时，若是您不想接听此来电，可操作skype界面上的拒绝键来对来电的拒绝/挂断。
6. 通话结束耳机自动转到立体声模式欣赏音乐。

QQ通话

1. 打开耳机，连接成功后，电脑打开QQ:

2. QQ设置：打开一个QQ聊天介面，点击音频设置，将输入和输出设置为蓝牙音频，然后点击完成。

3. 去电拔号功能：此操作只能在QQ上进行，通过鼠标对QQ进行操作。

4. 接听通话功能：QQ来电后，振铃传到蓝牙耳机上，按QQ界面接听键接听来电，PC和QQ上会显示相应的正在通话状态。

5. 挂机/拒绝来电的功能：

当QQ来电后，在接听完闭，按QQ界面上挂机键结束通话。

当QQ来电时，若是您不想接听此来电，可操作QQ界面上的拒绝键来对来电的拒绝/挂断。

6. 通话结束耳机自动转到立体声模式欣赏音乐。

☞ **注意：**

a. 在使用耳机利用网络远程通话时，使用的蓝牙适配器驱动软件不同，使用的操作方法也不同。

b. 在使用耳机利用网络远程通话时，如通话无声，请将通话工具(QQ、Skype、MSN)的音频设置的音频输入、输出均设置在蓝牙状态。

常见问题

1. 红色指示灯缓慢闪烁?

说明蓝牙耳机电池电量不足。请尽快给耳机充电。

2. 充电二十分钟后耳机不能开机?

蓝牙耳机至少充电40分钟后才能开机，强烈建议使用前将电池充足。

3. 充电时没有指示?

如果耳机电池完全用尽或者长时间不使用后首次充电，开始几分钟可能没有充电指示，稍等之后红色指示灯就会亮起指示充电。

4. 耳机中没有声音?

- 确定耳机与手机已经配对成功

- 确定耳机已经开机
- 确定耳机和手机距离不超过5M
- 确定您的手机在足够信号强度范围之内
- 某些手机仅仅支持一个蓝牙耳机，当有多于一个的蓝牙耳机与其配对时可能就会造成联系中断。

5. 我的蓝牙耳机已经充电并且开机，为什么手机和耳机不能正常工作?

你必须确定您的手机支持蓝牙功能，并且和耳机完成了配对。

6. 蓝牙耳机是否支持所有的手机?

不是的，蓝牙耳机仅仅支持带有蓝牙耳机和免提功能的手机。

7. 蓝牙耳机和手机通讯的有效距离是多少?

大约5米。

8. 为什么我的手机和耳机配对时，手机会找到另外一个蓝牙设备?

蓝牙手机配对时，有效范围内的所有蓝牙设备

都会被搜索到 (比如PDA，笔记本电脑……)，可能显示“Z-W88”或者“未知设备”。

9. 为什么我的手机配对时不能搜索到我的蓝牙耳机?

如果蓝牙耳机不在配对状态下，则不能被搜索到。请将耳机置于配对状态下。

10. 是否每次使用蓝牙耳机都要进行配对?

不需要，蓝牙耳机和手机仅在第一次使用时需要配对，之后即使设备关闭也不需要再次配对。

11. 为什么耳机会有杂音?

通话质量将受到以下两方面的影响

* 如果你的手机信号比较微弱，通话质量也会相应比较差。
* 手机和耳机的距离超过标准距离也会增大噪音
* QQ、skype的通话质量将受网络的影响。

12. 如果耳机听不清楚怎么办?

调节手机上的音量或者按耳机的音量增加键以增大音量，同时注意您的手机信号是否足够。

13. 为什么我的耳机突然不能工作了?

可能是因为耳机的电池电量不足。电量不足时红色指示灯会闪烁，耳机发出“嘀，嘀”提示音。

14. 为什么我不能使用来电显示了呢?

拨打用户不显示来电，或您的手机不支持来电显示。

11. 为什么不同手机的电话接听方式不同?

这是因为不用的手机制造厂商使用不同的蓝牙软件。比如说T610只要轻触S4键就可以立即接听，然而P800和P900必须按S1键3秒钟才能连接并接听。造成这些区别的原因是由于P800和P900是属于智能手机，智能手机对于这些按键的定义可能有所不同。一般处理接听来电的方法分为“轻触”和“按下3秒钟”。

产品保养

* 使用非原装的配件可能引起性能下降、人身伤害、

电气短路以及保修的失效。

* 分解拆卸您的蓝牙耳机有可能会导致耳机损坏，并使保修失效。
* 不要将耳机置于灰尘较多的环境下。
* 使用干净、柔软、干燥的布清洁您的耳机。
* 不使用耳机时请将耳机置于原包装内。
* 不要让儿童玩耍耳机，他们有可能伤害自己或者损坏耳机。
* 不要将耳机置于过热或者过冷的环境中，否则耳机有可能暂时无法使用。

旅行充电器

* 充电器仅被设计成在室内使用，请勿在室外使用。
* 充电器只能使用标示的输入电压。
* 从插座上拔出充电器时请勿拉拽电线，否则可能损坏充电器。

电池相关信息

新电池

第一次使用时，将充电适配器连接到耳机充电至少4个小时。

电池保养

* 请到由资质的维修中心拆卸或更换电池。
* 如果仔细使用，可充电电池的寿命会很长。
* 可充电电池的充电温度在10℃至45℃。
* 室温下使用可以达到电池的最大容量。
* 户外低温下使用会导致电池容量降低。
* 耳机长时间不使用时，至少两个月充电一次。

功能特点与规格

- 无线欣赏手机内播放的立体声音乐；
- 无线拨出、接听手机电话；
- 无线收听电脑播放的立体声音乐；
- 利用网络实现远程无线双向通话；
- 无线收听立体声音乐、拨出、接听电话自动转换；
- 高保真、CD音质效果；
- 远程控制音乐播放的状态(遥控控制音乐播放、暂

停、上下选曲、音量调节)；
- 高灵敏度、全向型麦克风设计，话音清晰、无回音。

产品规格及参数：

产品名称	运动型蓝牙立体声耳机
版本	蓝牙V2.1+EDR
频率范围	2.402GHz~2.480GHz ISM Band
接收灵敏度	-80dbm
无线发射标准	CLASS 2
频道	79channels of 1MHz BW
连接方式	点对点
发射范围	≤10M
频率响应	20Hz-20KHz
信噪比	80db
喇叭输出功率	2X10mW
状态指示	红色Led通话状态 蓝色Led立体声状态，充电指示
适用配对产品	符合AD2P、ACVRP蓝牙协议的电脑、USB蓝牙适配器、蓝牙手机等
电池	聚合物锂离子电池 3.7V 150mA
充电时间	1-2小时

充电电源	电脑USB 5V
操作时间	大于5小时(电池饱和状态)